


# Pedestrian Footbridge

Typical base build up for concrete base

0.5mm dia grit cast onto uncured surface

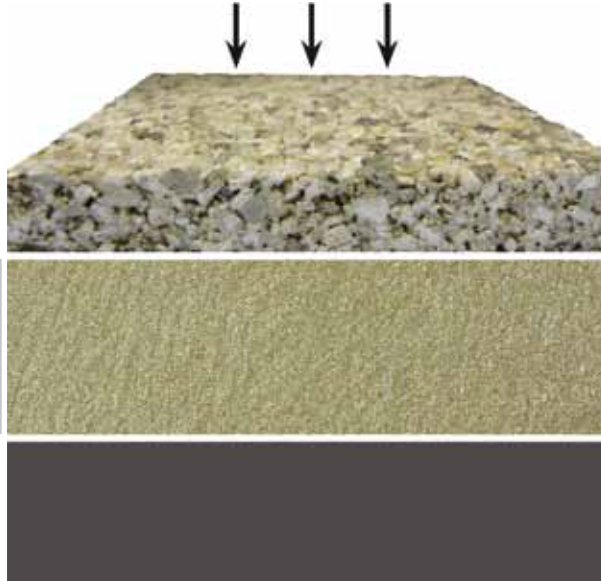

**Surface Course**

Hand applied and trowelled to a smooth finish by Chameleon Ways certified applicators

**Addabound resin bound paving depth requirements**

3mm mix requires a minimum depth of 1/2 inch  
6mm mix requires a minimum depth of 5/8 inch  
10mm mix requires a minimum depth of 7/8 inch

**Concrete Deck**

Designed to engineer's specification to a minimum fall of 1.5%

**Sub-structure**

Designed to engineer's specification

*Newly laid bituminous surfaces are able to be treated 30 days or longer after installation to be sure all volatiles have dissipated from the surface. Newly placed concrete surfaces are able to be treated upon complete cure of concrete approximately 30-90 days after placement. If areas need to be installed sooner please consult with your approved Addabound installer.*



NOTE: A suitable steel, wood, brick, stone or aluminium edging should be provided to ensure a neat edge detail.

Any advice, recommendation or information given by Chameleon Ways, Inc is based on practical experience and is believed to be accurate at the time of publication, no liability or responsibility of any kind (including liability for negligence) is accepted in this respect by the company, its employees, or applicators.

It is recommended that a certified professional engineer design and develop the proper base structure requirements to support the expected loads and taking into account the climate and site specific conditions which may exist.